


Ground-Effect Spreading Bucket

Designed to be strong, lightweight and to provide an even spread distribution. The Ground-Effect Spreading Bucket will ensure that your investment will provide maximum return.

The **Ground-Effect Spreading Bucket** has been successfully implemented into many countries throughout the world for a variety of applications.

With a strong network of representatives supporting various local markets the **Ground-Effect Spreading range** will prove to be an essential addition to any professional helicopter agricultural operation.



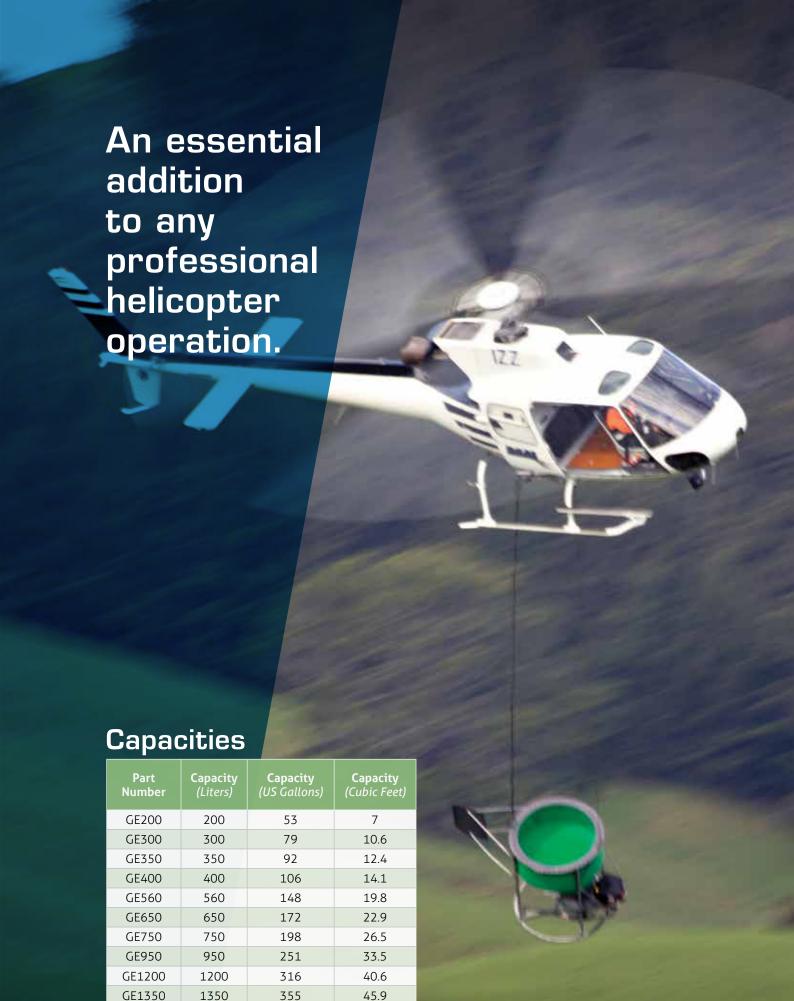

GE1500

GE1650 GE2400

GE2700

1500

1650

2400

2700

396

436

634

713

53

58.3

84.7

95.3

Granular Variable Flow Control

With the option of choosing a Variable Flow Valve in this series of the Ground -Effect Spreading Bucket, the pilot can manually adjust the Variable Flow Control Valve with the remote speed control. This can be done while in flight.





Ground-Effect Spreading Bucket Accessories

Ground-Effect Spreading Buckets can be specifically designed for purpose including for pest and mosquito control.



Hopper Lid

Robust Hopper lids with zipped openings are available for the entire **Ground-Effect** range.

Spinner & Motor


A range of spinner and motor configurations are available to suit your specific application requirements. The team at IMS New Zealand will work with you to supply the optimum system for your needs.





Bucket Mounted Air Compressor

Providing a compressed air supply to operate the slide valve to ensure fast open and close movements.

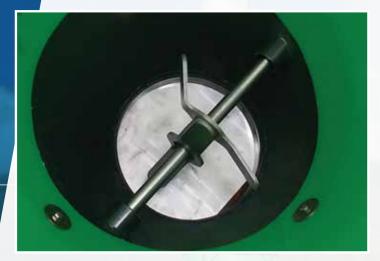

Product Agitator

Maximizes product flow to the spinner and reduces product bridging in hopper.



Heavy Rate Applicator

IMS New Zealand have developed a Heavy Application System for applying bulk fertilizer products dry or wet at rates in excess of 500 Kgs per Hectare (500lbs per Acre).

The **Heavy Rate Applicator valve** opening is pneumatic and is powered by a bucket mounted air compressor. Adjustment of the door opening position allows the operator to vary the application rate simply and quickly without the requirement of any special tools.

Agitator systems are also available for the **Heavy Rate Applicator** which minimizes the risk of dry product bridging or hanging up in the bucket.

These systems are available in a range of sizes and come complete with certified lifting lines, Spreader Bar suited to your helicopter, and wiring to the top of the Lift Lines.

Contact us for information on a system that best suits your application.



Concrete/Masonry Skip

A skip for placement of wet cement / masonry products that is available with manual door actuation or pneumatic door actuation.

A robust and effective skip for a wide range of products.

A full range of **underslung skips** are available to suit your specific needs with a range of volumes and release configurations including pneumatic and manual operation.

The tough and effective **skips** are suitable for concrete positioning and masonry product handling and are available in mild steel and aluminum construction.









Capacities

Capacity (US Gallons)	Capacity (Liters)	Capacity (Cubic Feet)
40	150	5.3
53	200	7
66	250	8.8
79	300	10.6
92	350	12.4
106	400	14.1
119	450	15.9
132	500	17.6
145	550	19
158	600	21
171	650	23
184	700	24
237	900	32
290	1100	39
286	1300	46
396	1500	53

Ground-Effect Hydra-Loader

Looking for a fast and effective way to load your Ground-Effect Spreading Bucket? Try our Hydra-Loader.

The **Ground-Effect Hydra-Loader** incorporates a digital load cell system to ensure precise bucket loading saving you time and ensuring effortless accuracy and consistency with each job.

Designed with the operator in mind it incorporates features to eliminate product waste, optimize efficiency and have low maintenance requirements.





Ground-Effect Fuel Trailer

The Ground-Effect Fuel Trailer is a certified tanker unit for remote access to Jet A1.

The tandem trailer has a capacity of 2000 liters (526 gallons) and has a diesel powered viton seal pump on board. The delivery system incorporates a full filtration system, flow metering unit, and an auto retracting reel with bowser nozzle. It also has a bonding reel for protection against static build up.

The **Ground-Effect Fuel Trailer** unit has been developed with ease of use and functionality built in, with additional baffling to avoid surging in any direction at any volume of fuel in the tank, fast delivery of fuel, ease of filling, and comfortable and safe towing with increased visibility for the vehicle driver of the tow vehicle.







For all your helicopter equipment needs, contact us today!



IMS New Zealand Limited

P. +64 21 583 033 **E.** imssales@imsheli.com **FB.** facebook.com/Ground-Effect Spreading Bucket for Aerial Agriculture

www.imsheli.com